



Wi-AP717MP
Hardware Version: V2.0

1. Packing Content



1 x Mesh Wi-Fi



1 x Quick Installation Guide



2 x Plastic Anchor



2 x Self-Tapping Screws



1 x 48V Power Adapter




1 x AC Power Cord



1 x Ethernet Cable

2. Appearance Overview

• Wi-AP717MP

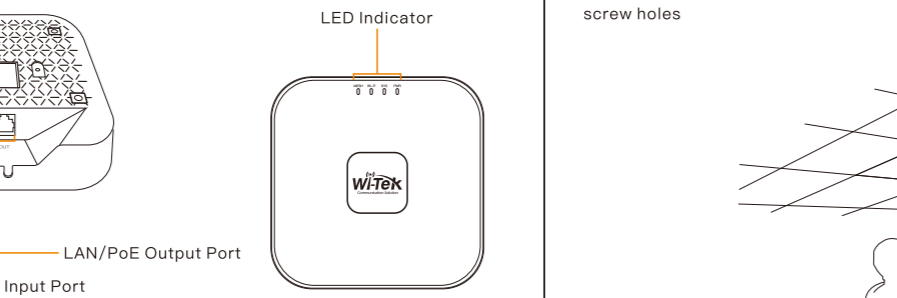

• LED Indicator

LED Indicators	Mode	Status	Description
MESH	Master Node	Off	All Mesh links are disconnected
		Blinking	The Mesh link is being established
	Slave Node	On	The Mesh link has been established
		Off	The Mesh link is not established
Wi-Fi	Wi-Fi Enabled	Blinking	The Mesh signal is poor or the Mesh link is disconnected
		On	The Mesh link has been established
	Wi-Fi Disabled	Blinking	Wireless Wi-Fi enabled
		Off	Wireless Wi-Fi disabled
SYS	Blinking	The system is restoring factory	
	On	Normal system operation	
PWR	On	The indicator is faulty or the system is abnormal	
	Off	The device is powered on	
PWR	On	The device is powered on	
	Off	The device is powered off	


• Port and Button

Port&Button	Description
RESET	Reset button, which is used to restore the factory. Holding down the reset button for 8 seconds to revert to factory settings.
WAN/PoE IN	10/100/1000Mbps Base-T Ethernet Port, which supports 802.3af PoE Input.
LAN/PoE OUT	10/100/1000Mbps Base-T Ethernet port, which supports 802.3af/a PoE Output.


3. Device Installation

• Ceiling Mounting


- 1. Place the bracket in the center of the ceiling and then mark the positions for the screw holes

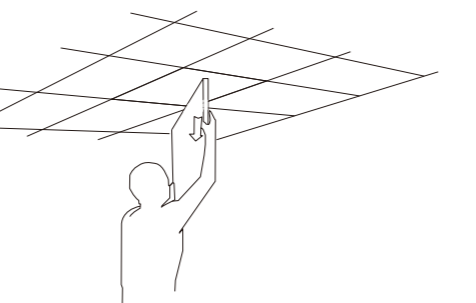


- 2. Drill holes in the marked positions using a hammer drill

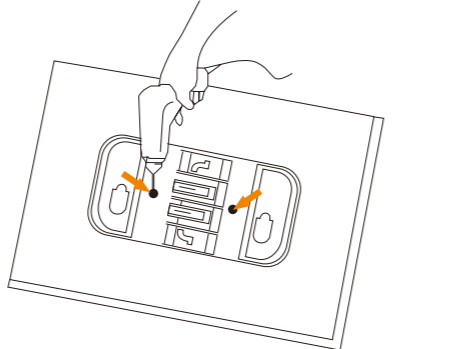


- 3. Knock the plastic anchors into the holes by using the rubber hammer. Align the screw holes in the bracket with the holes in the ceiling and use the self-tapping screws to fix the bracket.

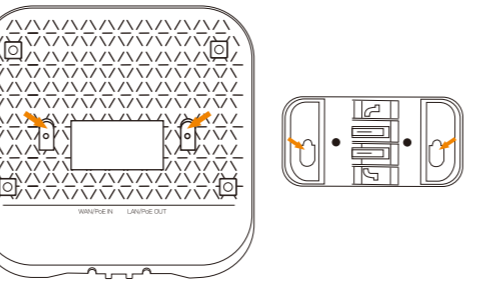

- 4. Align the device with the bottom cover of the bracket and push in parallel until the device is fixed on the bracket

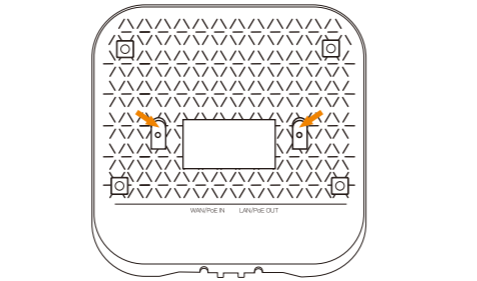

4. Setup new Master Node

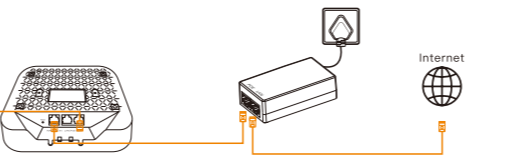

Please connect devices according to the above topology.


Follow the steps for quick Master node configuration, using initial setup wizard:

- Step 1: Please connect devices according to the topology above and make sure they are all powered on.

- Step 2: Launch web browser then enter the device IP address 192.168.10.1 to go into login UI, and specify the default login key: admin.




5. Adding new slave node

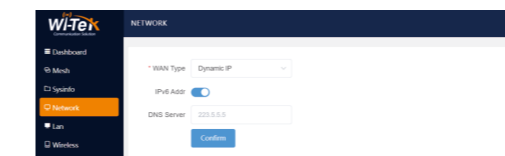


Note: No any setup for slave node during the period of mesh pairing.

- Step 5: After finishing configuration steps above, please power on the slave node and enter into the Master MESH function UI. Then click Search button to find secondary Mesh Wi-Fi.

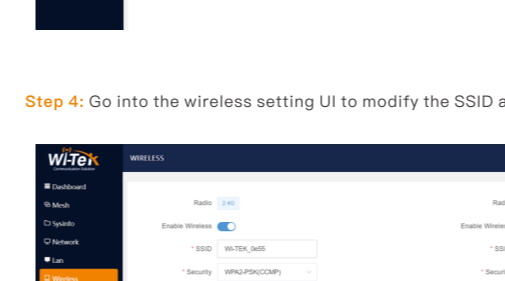


- Step 6: When the bar appears as below and shows the secondary Mesh Wi-Fi status is online, it indicates Mesh pairing is completed successfully.

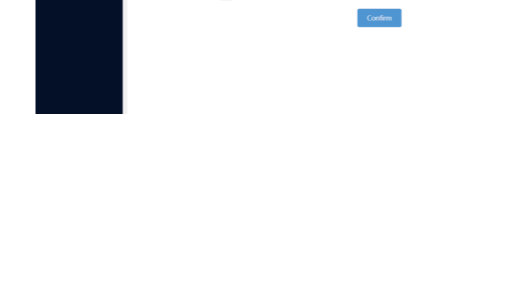


6. Quick Setup Wizard on Wi-Tek Cloud APP

- Step 3: Choose the type of Internet connections (the default WAN type is DHCP client mode)

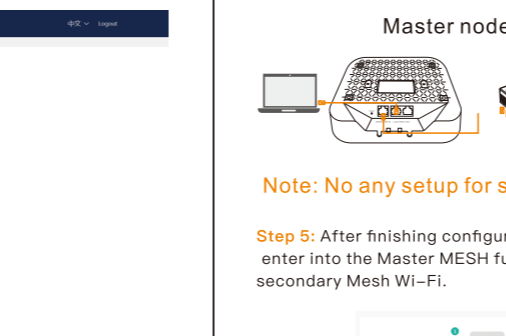


- Step 4: Go into the wireless setting UI to modify the SSID and Wi-Fi key you want.

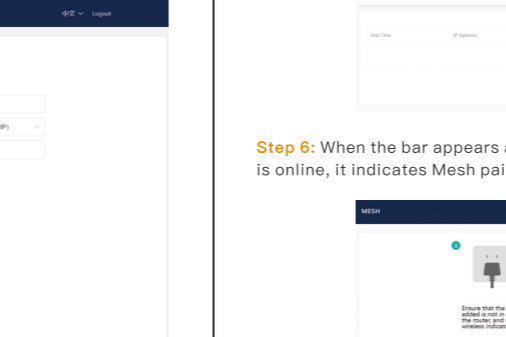


7. Warranty Card


- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.

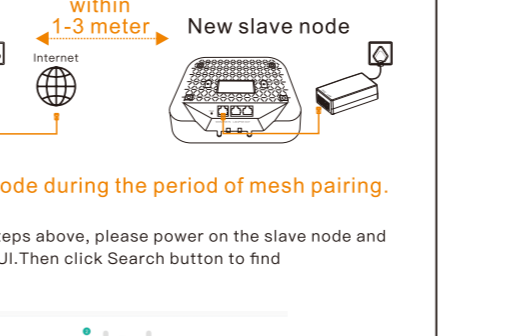

- 4. After completing the steps above, you can configure your network.

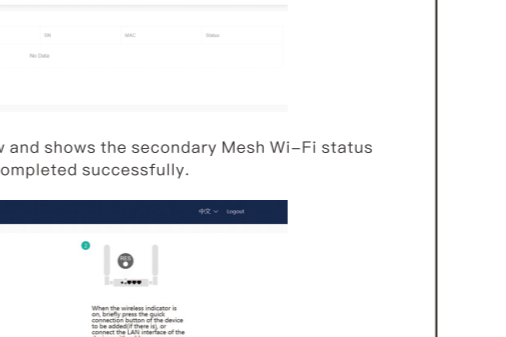


- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.




8. Quick Setup Wizard on Wi-Tek Cloud APP

- 1. Go into the APP UI as followings and then create a EasyMesh network project.

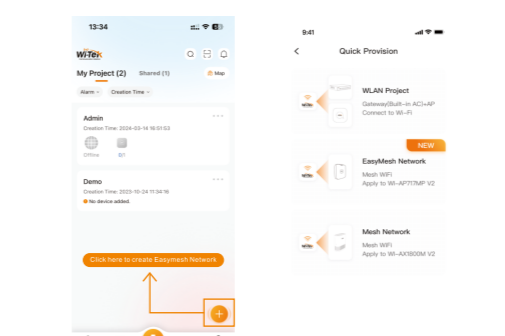

- 2. Please follow steps as followings: Power on your Mesh device and connect it to the Internet, then restore it to the factory.

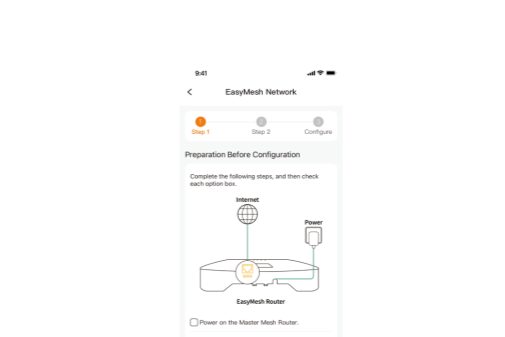


- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.




9. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.

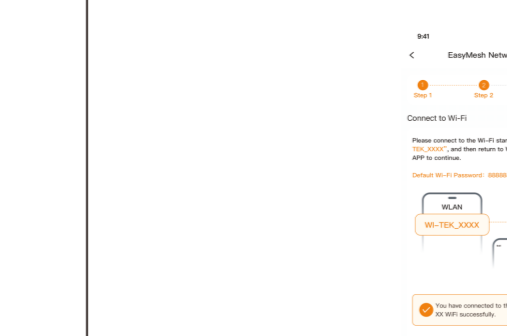

- 4. After completing the steps above, you can configure your network.

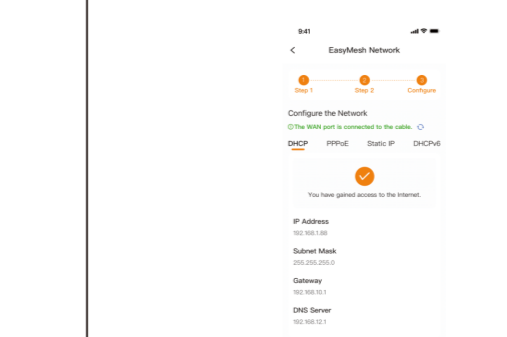


- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.




10. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.

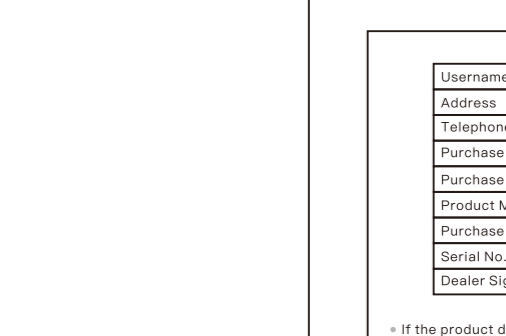

- 4. After completing the steps above, you can configure your network.

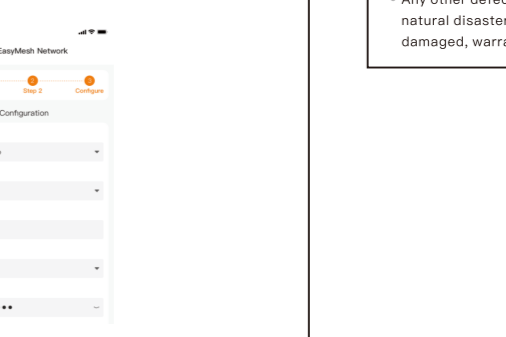


- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.




11. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.

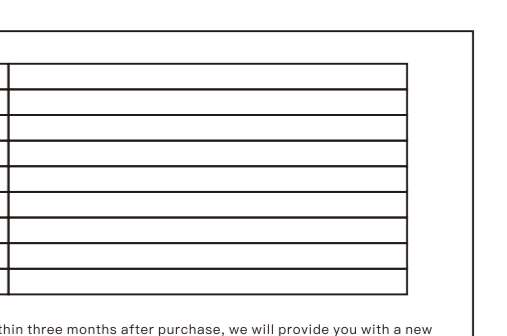

- 4. After completing the steps above, you can configure your network.

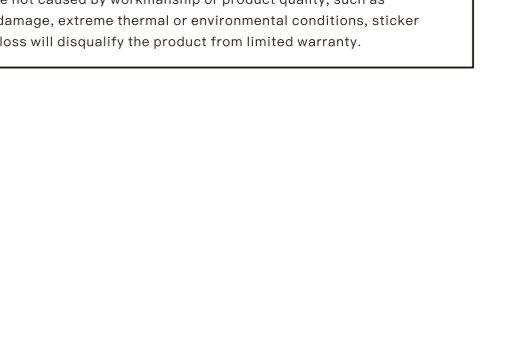

- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



12. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.



- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



13. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.



- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



14. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.



- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



15. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.



- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



16. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.



- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



17. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.



- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



18. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.



- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



19. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.



- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



20. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.



- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



21. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.



- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



22. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.



- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



23. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.



- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



24. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.



- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



25. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.



- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



26. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.



- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



27. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.



- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



28. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.



- 5. Setup Complete. After finishing configuring the network, your Mesh network is now up.



29. Warranty Card

- 3. Connect your phone to Wi-Fi. Note: The initial SSID is starting with "WI-TEK_XXXX" and the default password is 88888888.



- 4. After completing the steps above, you can configure your network.

